




TABANNIROO CO.

DENA POWER LINE INSULATORS

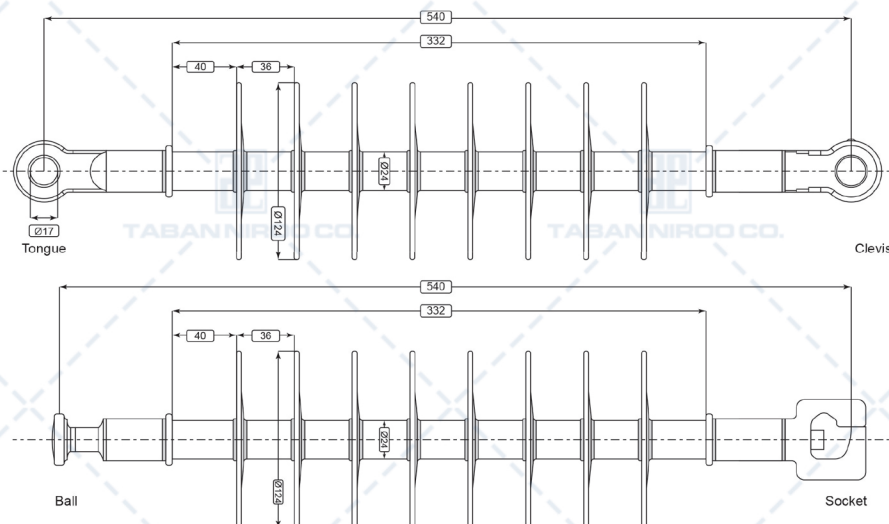

SUSPENSIONS & DEAD END INSULATORS

Catalogue No.		DPL11-560	DPL20-815	DPL33-1080	DPL33-1330
Rated Voltage KV		13.8	24	36	36
Shed No.		4	6	8	10
Specified mechanical load(SML) KN		70	70	70	70
Section length H.mm		393	465	537	609
Shed diameter D.mm		124	124	124	124
Space between two sheds B.mm		36	36	36	36
Leakage distance mm		560	815	1080	1330
Dry arcing distance h.mm		298	370	440	510
Lightning impuls withstand voltage KV	Positive	180	240	260	290
	Negative	205	255	290	380
60 Hz flashover withstand voltage KV	Dry	110	135	150	175
	Wet	58	110	125	150
Standard Package		12	12	12	9