




TABAN NIROOM CO.

DENA POWER LINE INSULATORS

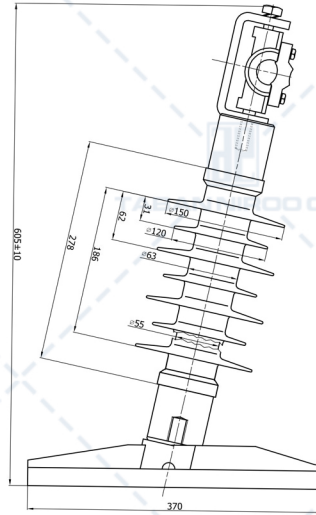

LINE POST INSULATORS

Product	Cross Armed 20L	Cross Armed 33L	Cross Armed 63L
Rated Voltage	24 KV	36 KV	66 KV
End fitting Material	Steel & Alu	Steel & Alu	Steel & Alu
Rod Material	Fiber Glass	Fiber Glass	Fiber Glass
Maximum Contalever Load Kn	14	12	10
Power frequency withstand Voltage Dry One Minute KV	90	120	215
Wet One Minute KV	70	95	170
Lighting impulse withstand Voltage KV	180	230	350
Greepage Distance mm	780	1170	1650
Net Weigth Kgs	9.150	10.200	11.300



According to IEC61952 (2008) & IEC62217 (2005)