




TABANNIROO CO.

DENA POWER LINE INSULATORS

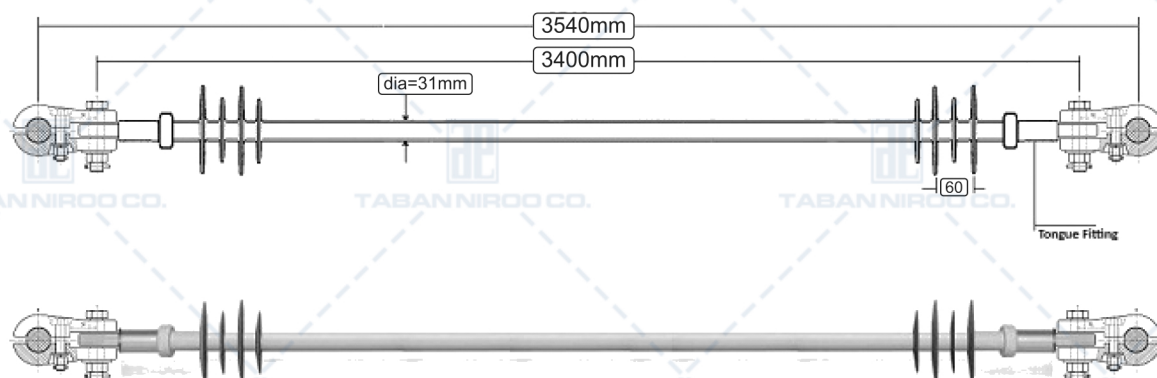

PHASE TO PHASE SPACER

Catalogue No.		DPL 66/225/T.T	DPL 132/225/T.T	DPL 230/160/T.T	DPL 400/160/T.T
Rated Voltage KV		66	132	230	400
Diameter of innercore mm		24	24	24	24
Section length mm		3400	4900	5700	9800
Greepage Distance mm		3750	6000	10000	20000
Arcing Distance mm		3065	4500	5500	19400
Lightning impuls withstand voltage KV	Positive	1350	1550	1650	2450
	Negative	1500	1600	1750	2550
60 Hz flashover power frequency withstand voltage KV	Dry	650	725	800	1150
Net Weight Kg		8.500	13	20.300	30.500
Standard Package		1	1	1	1



According to IEC61109 (2008) & IEC62217 (2005)