




TABAN NIROY CO.

DENA POWER LINE INSULATORS

POST INSULATORS

Catalogue No.		DPL 20-900- *SCL PI	DPL 33- 1400-*SCL PI	DPL 63- 2280-*SCL PI	DPL 132- 4780-*SCL PI	DPL 230- 6580-*SCL PI	DPL 400- 14190-*SCL PI
Rated Voltage (kV)		20	33	63	132	230	400
Cantilever Strength (kN)		up to 12.5	up to 12.5	up to 16	up to 16	up to 16	up to 16
Torsion Strength (N.m)		up to 3000	up to 3000	up to 6000	up to 6000	up to 6000	up to 6000
Creepage Distance (mm)		>900	>1400	>2280	>4780	>6580	>14190
Arcing Distance (mm)		310	430	630	1445	2160	3090
Lightning Impulse Withstand Voltage (kV)	Positive	150	170	450	650	1050	1550
	Negative	170	190	470	670	1070	1570
Power frequency withstand voltage (kV)	Dry	70	90	210	315	530	770
	Wet	50	70	185	275	460	680
Standard Package		1	1	1	1	1	1

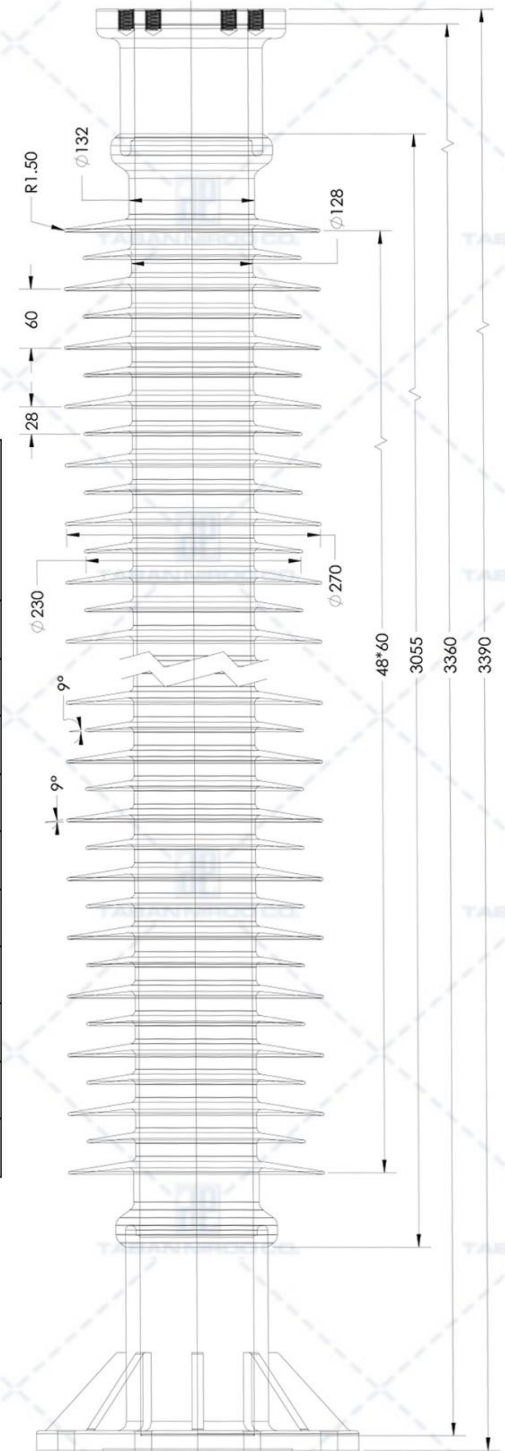

Designed and manufactured according to IEC 61109, IEC 62217 & IEC 60120