



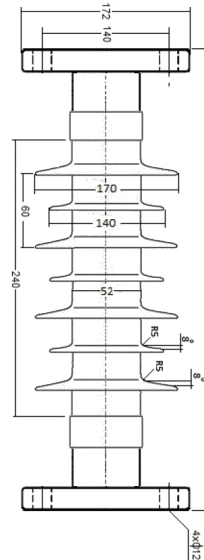

TABAN NIROO CO.

DENA POWER LINE INSULATORS

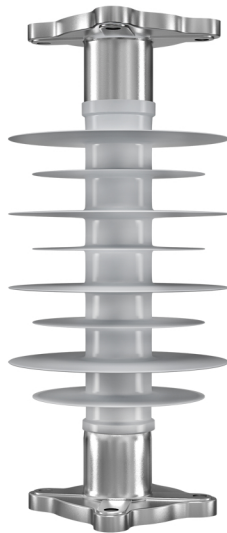

Rail way Post Insulator

Catalogue No.	DPL7-24 RW	
Rated Voltage KV	36	
Shed No.	7	
Cantilever strength KN	13	
Section length H.mm	400	
shed diameter D.mm	170/140	
Space between two sheds B.mm	30	
Leakage distance mm	900	
Dry arcing distance mm	310	
Lightning impuls withstand voltage KV	Positive	240
	Negative	255
60 Hz flash over with stand voltage KV	Dry	135
	Wet	110
Standard Package	3	



According to IEC61952 (2008) & IEC62217 (2005)