




TABAN NIROOM CO.

DENA POWER LINE INSULATORS

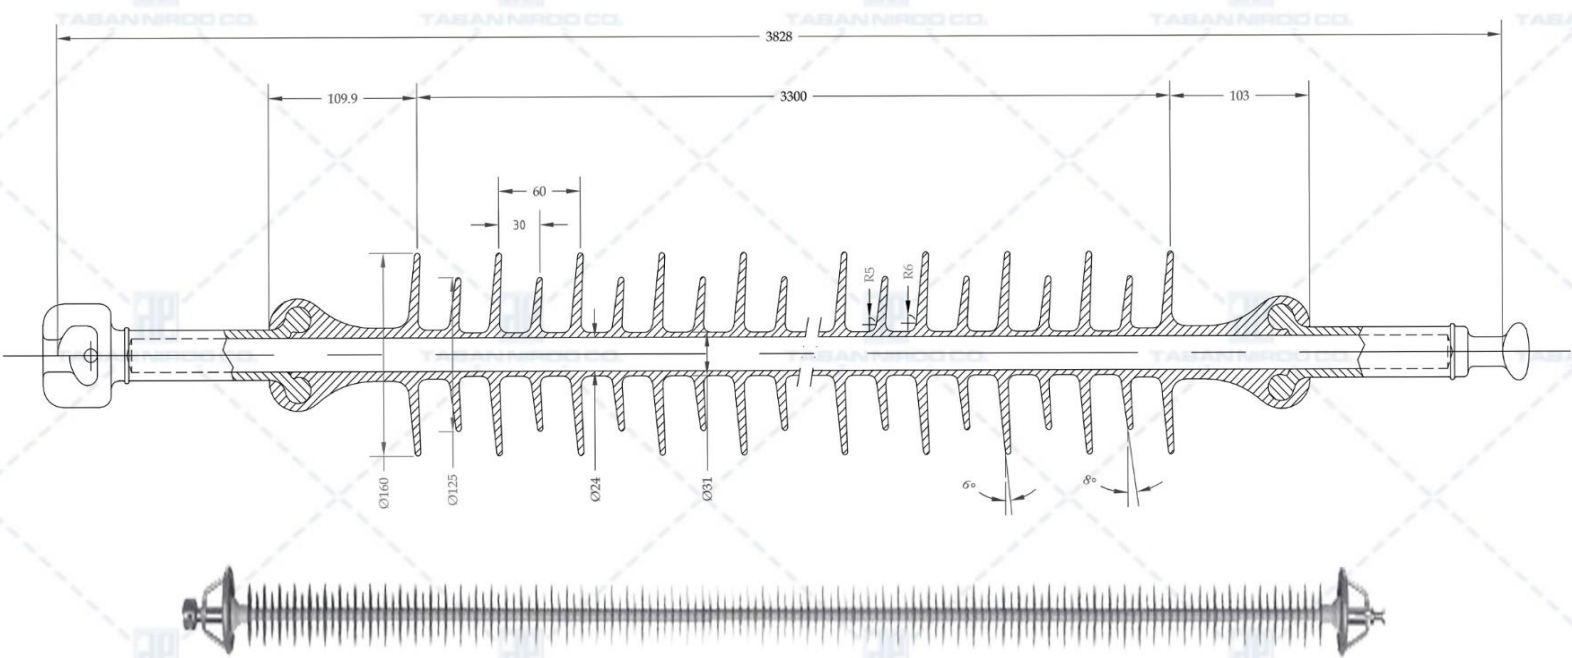

400 kV TRANSMISSION SILICONE RUBBER INSULATORS - TYPE 2

Catalogue No.		DPL400/160-111 BS DPL400/210-111 BS	DPL400/160-127 BS DPL400/210-127 BS	DPL400/160-143 BS DPL400/210-143 BS
Rated Voltage kV		400	400	400
Shed No		111	127	143
Section Length mm		3808	4288	4768
Creepage Distance mm		14804	16917	19030
Arcing Distance mm		3560	4040	4520
Lightning Impuls Withstand Voltage kV	Positive	1800	2100	2300
	Negative	1850	2200	2450
60 Hz Flashover Power Frequency Withstand Voltage kV	Dry	925	1020	1150
	Wet	720	850	920
Net Weight Kg		-	-	-
Standard Package		1	1	1



Designed and manufactured according to IEC 61109, IEC 62217 & IEC 60120