




TABAN NIROO CO.

DENA POWER LINE INSULATORS

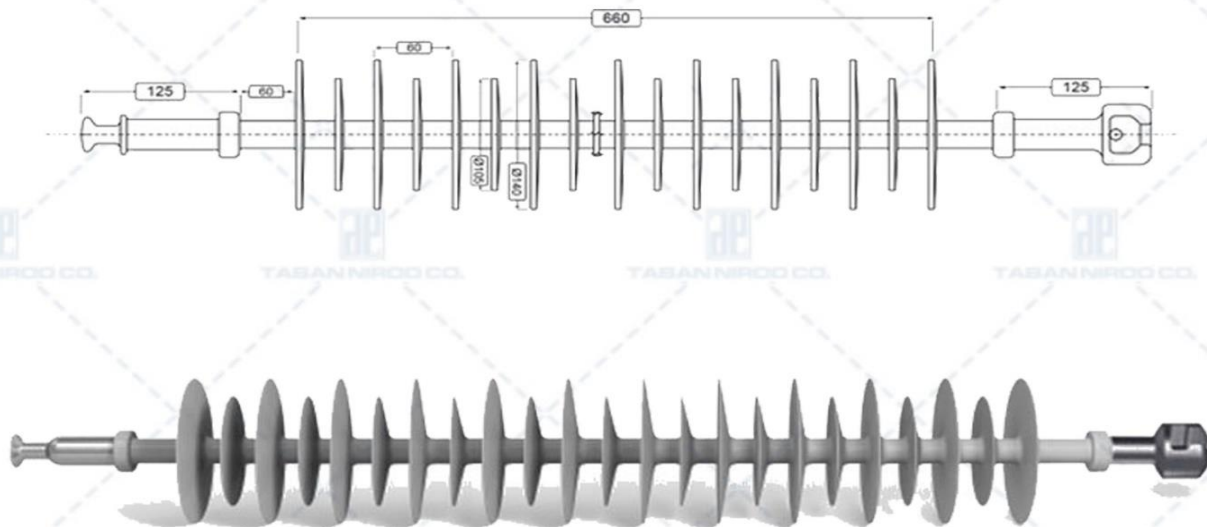

63 KV TRANSMISSION SILICONE RUBBER INSULATORS - TYPE 1

Catalogue No.		DPL63/80-19 BS	DPL63/80-21 BS	DPL63/80-23 BS
		DPL63/120-19 BS	DPL63/120-21 BS	DPL63/120-23 BS
Rated Voltage KV		66	66	66
Shed No		19	21	23
Diameter Of Innercore mm		18	18	18
Specified Mechanical Load(SML) KN		80/120	80/120	80/120
Section Length H.mm		910±2	970±2	1030±2
Large Shed Diameter D.mm		140±1	140±1	140±1
Small Shed Diameter d.mm		105±1	105±1	105±1
Space Between Two Sheds B.mm		60	60	60
Leakage Distance mm		2530±5	2730±5	2930±5
Dry Arcing Distance h.mm		720	780	840
Lightning Impuls Withstand Voltage KV	Positive	410	440	460
	Negative	440	460	480
60 Hz Flashover Power Frequency Withstand Voltage KV	Dry	320	330	340
	Wet	240	250	260
Net Weight Kg		3.550	3.800	4.050
Standard Package		3	3	3



According to IEC 61109 (2008) & IEC 62217 (2005)