




TABAN NIROO CO.

DENA POWER LINE INSULATORS

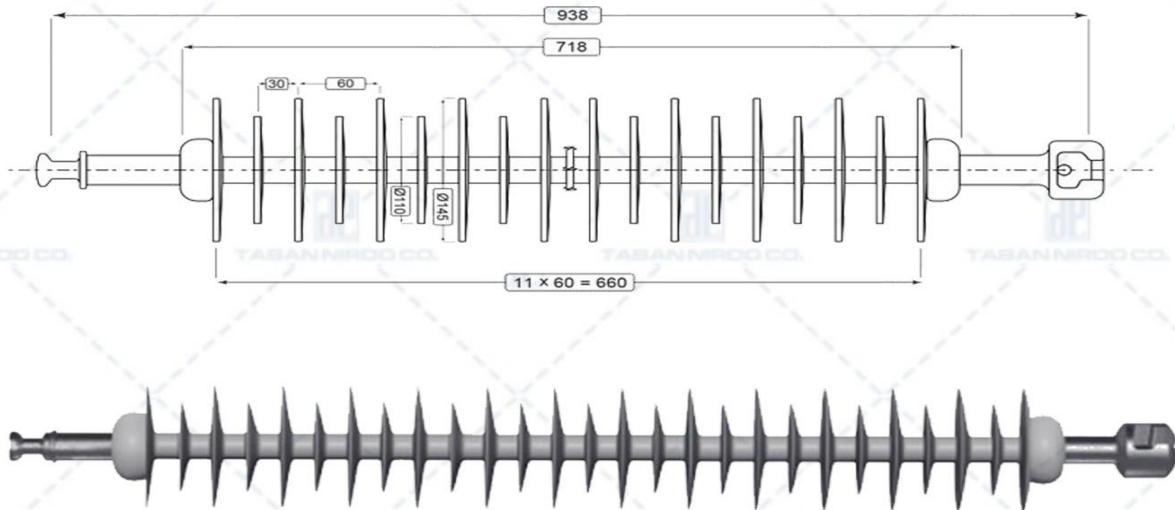

63 KV TRANSMISSION SILICONE RUBBER INSULATORS - TYPE 3

Catalogue No.		DPL63/80-19 BS	DPL63/80-21 BS	DPL63/80-23 BS
		DPL63/120-19 BS	DPL63/120-21 BS	DPL63/120-23 BS
Rated Voltage KV		66	66	66
Shed No		19	21	23
Diameter Of Innercore mm		22	22	22
Section Length mm		818±2	878±2	938±2
Creepage Distance mm		2250	2450	2650
Arcing Distance mm		658	718	778
Lightning Impuls Withstand Voltage KV	Positive	440	450	460
	Negative	460	470	480
60 Hz Flashover Power Frequency Withstand Voltage KV	Dry	320	330	340
	Wet	240	250	260
Net Weight Kg		5.300	5.550	5.800
Standard Package		3	3	3



According to IEC 61109 (2008) & IEC 62217 (2005)